
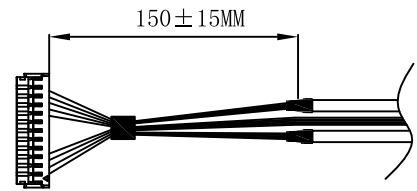


RoHS

Version No.	Modification	Date
A		

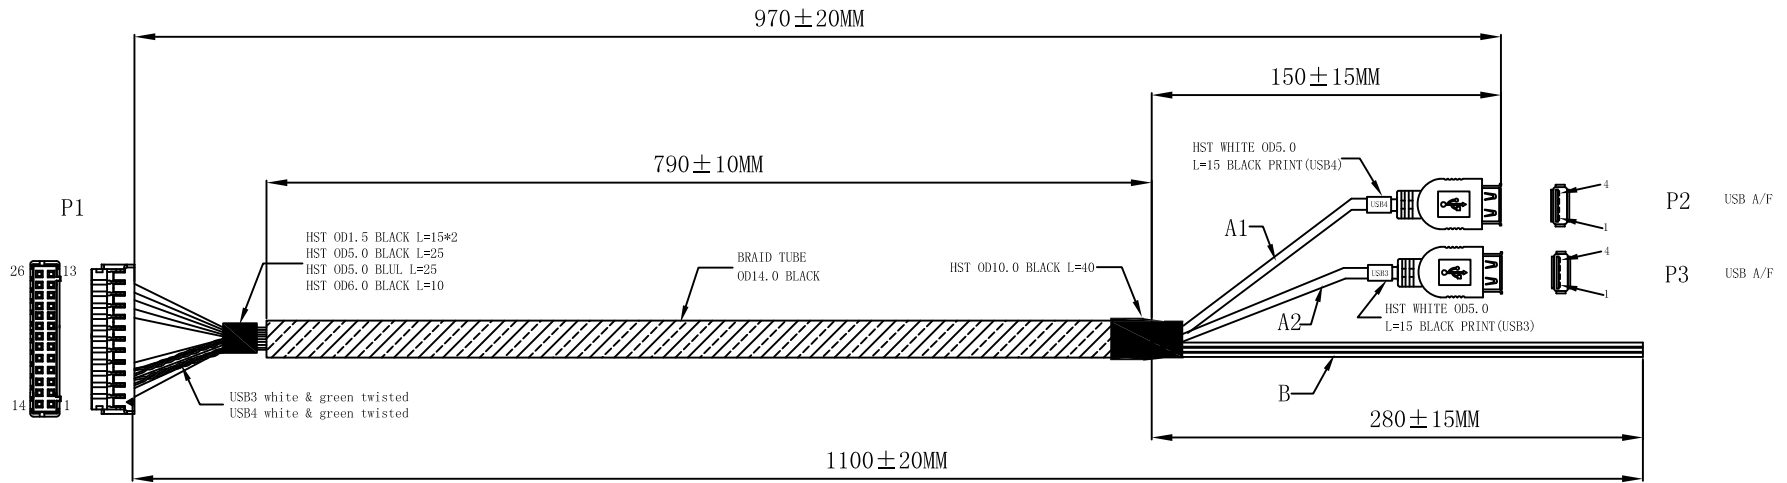

WIRE:
 A1, A2: UL2725 28AWG (TS7/0.127*0.127*0.9*1PR (HD-PE) + TS7/0.127*0.127*0.9*2C+AL+D (7/0.127) + B (TS16/4/0.1) OD4.0 BLACK
 B: UL1061 24AWG (Ts7*0.20*1.1) GREEN, PURPLE, WHITE
 C: UL1061 24AWG (Ts7*0.20*1.1) BLACK

PIN WIRING


P1, 1 BLACK (C)	BRAID (A1)	P2, SHELL
	BLACK (A1)	P2, 4
P1, 2	GREEN (A1)	P2, 3
P1, 3	WHITE (A1)	P2, 2
P1, 4	RED (A1)	P2, 1

PIN WIRING


P1, 14 BLACK (C)	BRAID (A2)	P3, SHELL
	BLACK (A2)	P3, 4
P1, 15	GREEN (A2)	P3, 3
P1, 16	WHITE (A2)	P3, 2
P1, 17	RED (A2)	P3, 1

PIN WIRING

P1, 13	GREEN (B)	CUT END
P1, 23	PURPLE (B)	CUT END
P1, 26	WHITE (B)	CUT END



Ecocables Electronics Co., Ltd
www.ecocables.net

Customer	Customer No.		Product name		
Material name	Approved		Tim. Z		
Unit	Scale	Free	Checked	Daivd.L	Revision date
mm			Drawn by	Percy.F	Drawn date Sep 18, 2017